


The COVER 95.96 can be vented, with loudspeaker or gas detector vent, with custom drilling and with a slot for a mains multi-socket. Usa-Europe-Shuko.

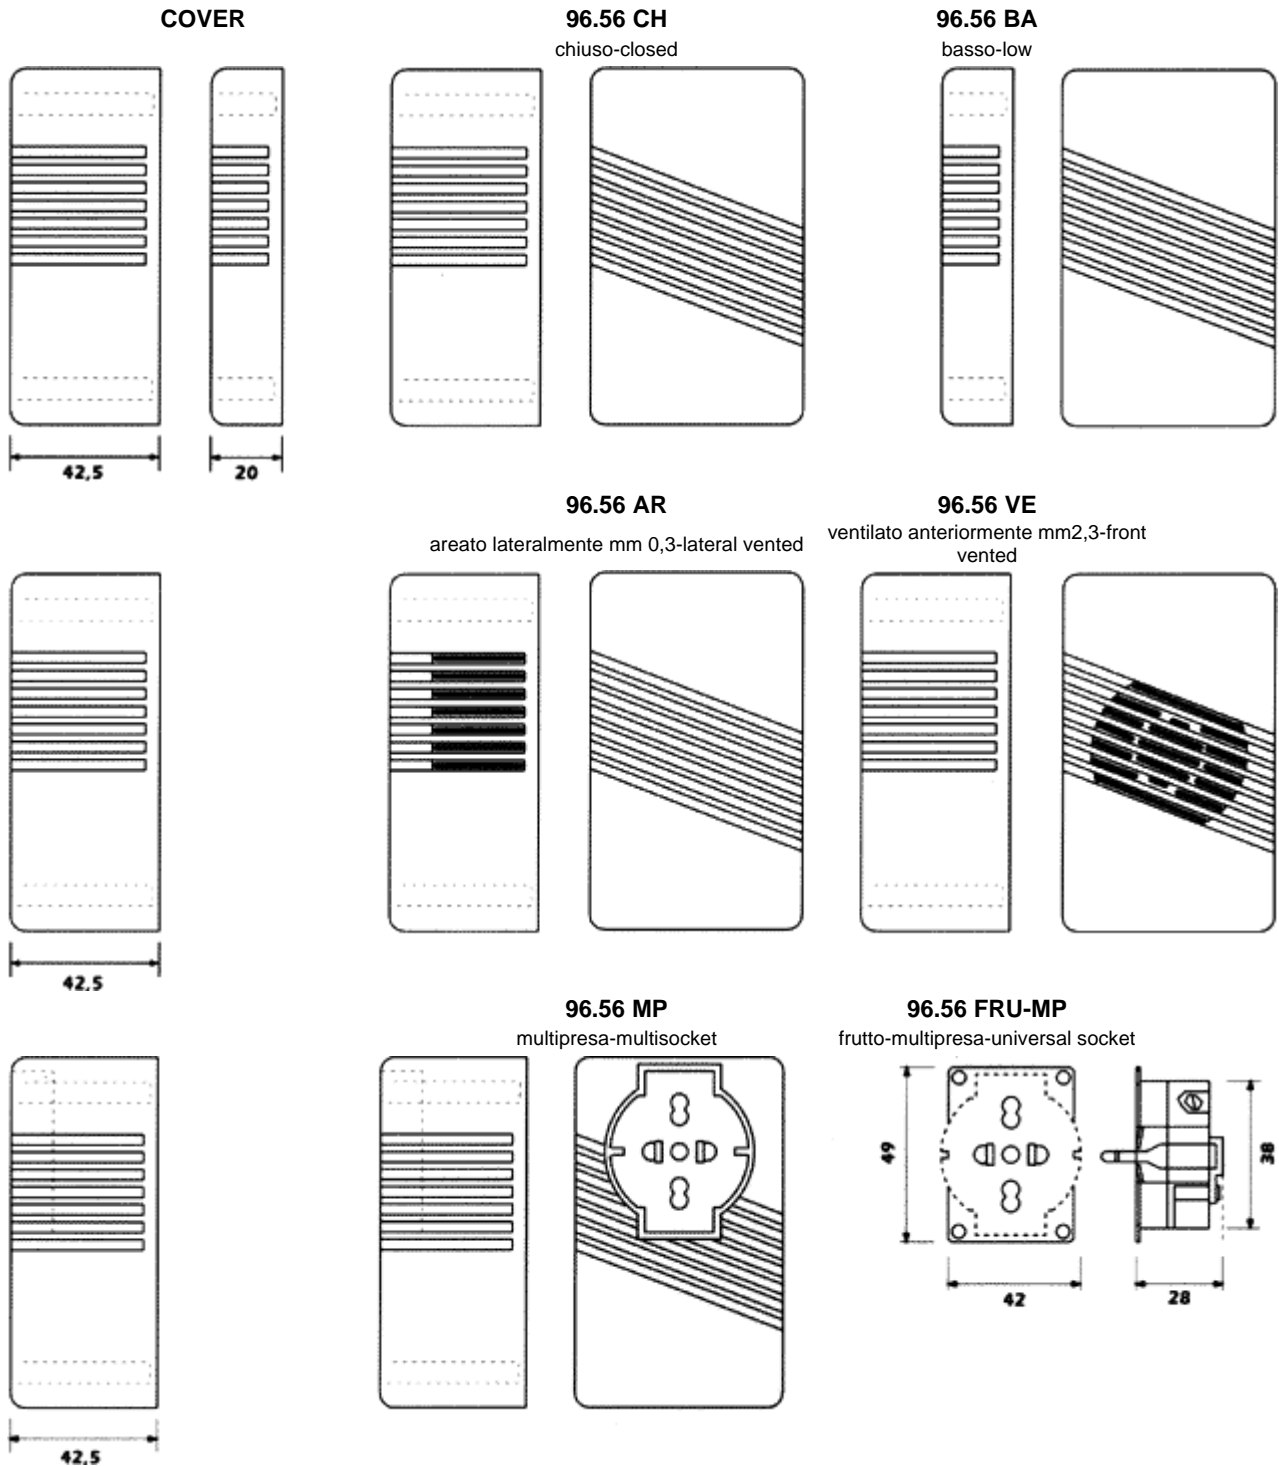



The bases 96.56 can be delivered blind or with plugs according to the most common standards in Europe. The bases are equipped with four towers for p.c. boards mountig, two cable fasteners and four holes for mechanical mounting.

BASI-BASES


96.56 EV

96.56 EVT


96.56 SS

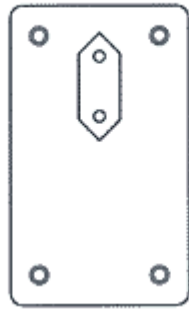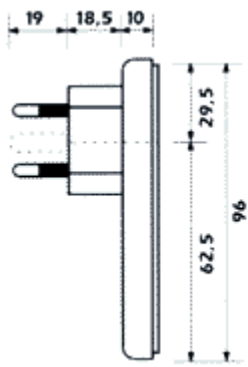

96.56 EO

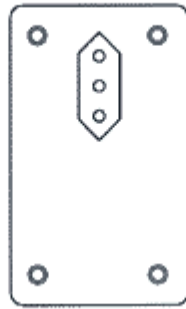



96.56 EOT

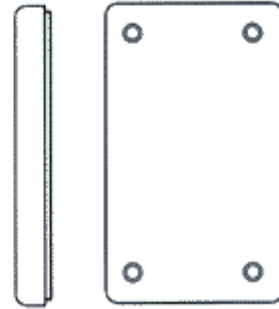


96.56 AM




96.56 SS/CO

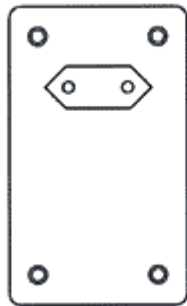

96.56 TV

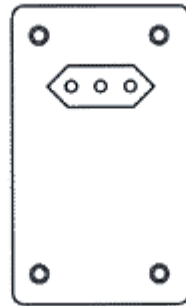






96.56 TVT



96.56 TO



96.56 TOT

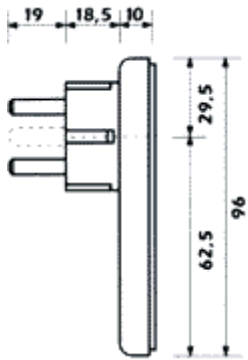

Print

Close